

## DAB Antenna Installation


1. Remove "A" Pillar trim from the passenger side.



2. Scratch away some paint from the A Pillar to attach the copper grounding lug. (Please tear out the sticker from the grounding lug surface and ensure the grounding lug has good conduction with the car's ground).



3. Attach the antenna to the windscreen once the copper grounding lug is secure. (Please try to keep the antenna away from the metal ground of the car, at a distance of 60mm at least, and you should place the antenna upward).

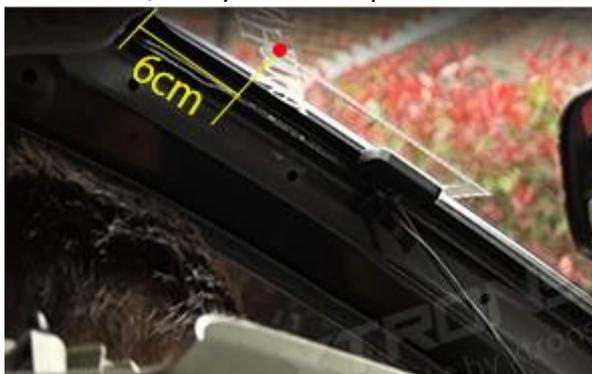

4. Run the cable to the rear of DAB stereo and connect to test. Refit the A Pillar once completed.

